


Designer	Content Kerabit Aurinkokatto Lightweight Aggregate Roof Concrete Deck		YP-2000	
Site	Work number	Roofing fire rating BROOF(t2)	Author	Date
	Roof pitch ≥1:80	Waterproofing classification VE80	Change	Change date

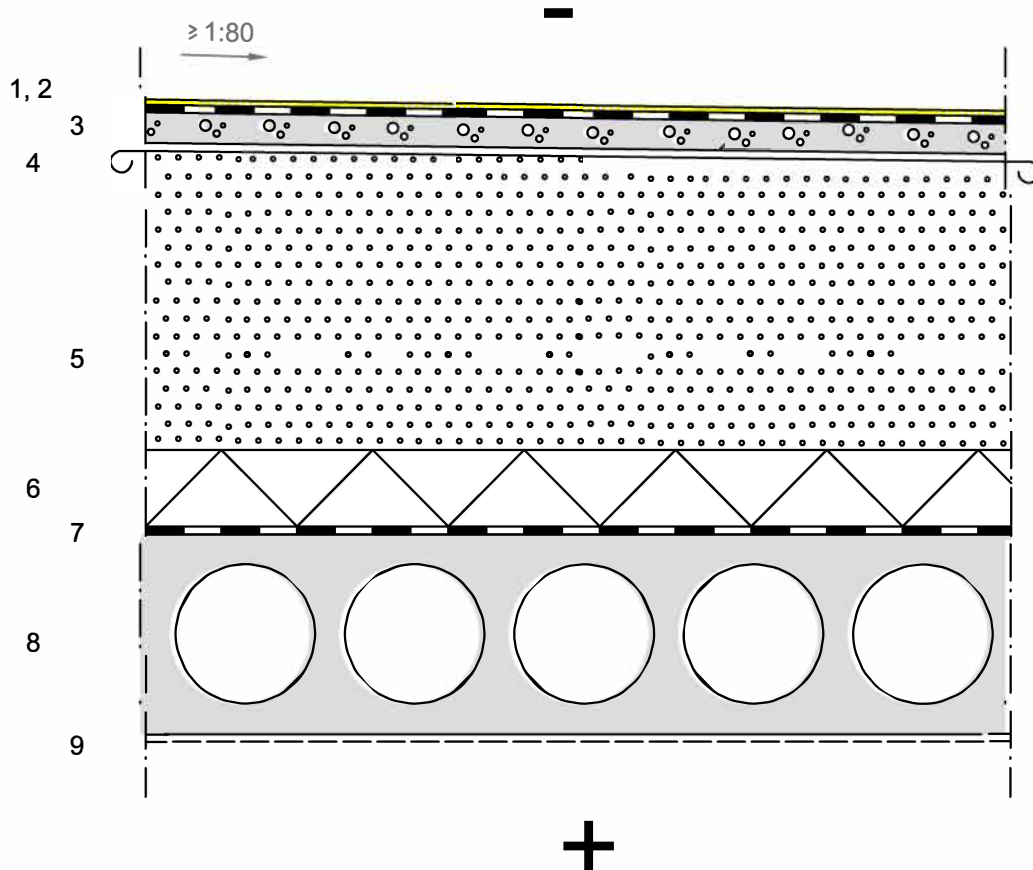

Structure from top to bottom:

1. Kerabit Aurinkokatto (thin-film solar panel with Kerabit Solar method)
2. Kerabit waterproofing VE 80 (TL 2 + TL 2), e.g. Kerabit 5100 T + Kerabit 3000 U
3. Concrete slab 30–50 mm (Os max 250 kg/m³)
4. Casting paper or filtering fabric, vapour-permeable
5. Lightweight aggregate, insulation thickness according to the structural design
6. Hard thermal insulation suitable for the purpose, insulation thickness according to the structural design
7. Vapour barrier, e.g. Kerabit 3000 UTL (BH 1, TL 2)
8. Load-bearing structure according to the structural design
9. Coating material and finishing according to the interior design specification

13 November 2017 Kerabit Oy

The drawing is indicative. The designer is responsible for any site-specific applicability thereof.

Kerabit
Tuotteet