


Designer	Content Kerabit Aurinkokatto Thermal insulation board decking (grooved structure) with corrugated sheet		YP-2001	
Site	Work number	Roofing fire rating BROOF(t2)	Author	Date
	Roof pitch ≥1:80	Waterproofing classification VE 80	Change	Change date

Scale 1:10

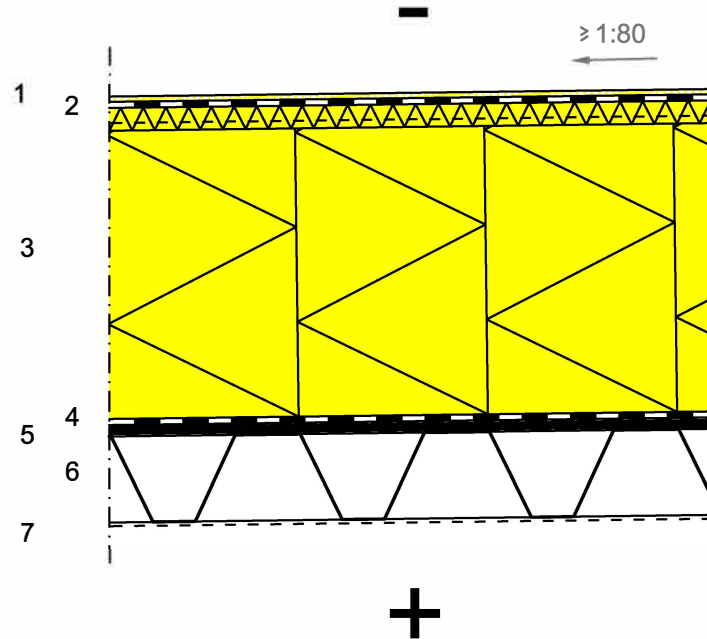

Structure from top to bottom:

1. Kerabit Aurinkokatto (thin-film solar panel with Kerabit Solar method)
2. Kerabit waterproofing VE 80 (TL 2 + TL 2), e.g. Kerabit 5100 T + Kerabit 3000 U
3. Thermal insulation (ventilation grooves) according to structural design + mechanical fixation
4. Vapour barrier, e.g. Kerabit 3000 UTL (BH 1, TL 2)
5. Construction panel according to the structural design, e.g. Kerabit OSB roof board
6. Load-bearing structure: corrugated sheet steel according to the structural design
7. Coating material and finishing according to the interior design specification

13 November 2017 Kerabit Oy

The drawing is indicative. The designer is responsible for any site-specific applicability thereof.

Kerabit
Tuotteet