


## Kerabit Root Prevention Membrane

Päivitetty 17.5.2021 Tulostettu 21.11.2024

Kerabit Root Prevention Membrane Grey is a torch-on modified bitumen membrane with product classification 2 used to protect green roof waterproofing against roots. It is used as an accessory for the sand-finish Kerabit Root Prevention Membrane in, for example, upturns and other visible details that remain exposed to sun rays.

The product has a strong polyester carrier and granulated surface. The root prevention membrane is tested according to standard EN 13948 (FLL method).

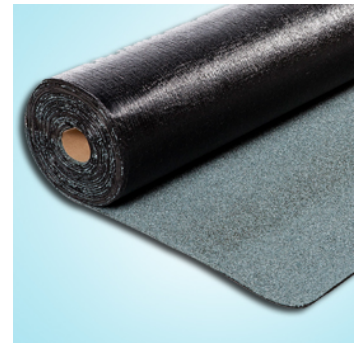

### Technical data

<b>Manufacturer / Manufactured for</b>	Soprema NV
<b>Country of origin</b>	Belgium
<b>Conformity marking</b>	CE
<b>Product category</b>	TL 2
<b>Nominal thickness</b>	3,9 mm
<b>Nominal weight</b>	4400 g/m <sup>2</sup>
<b>Supportive layer</b>	polyester
<b>Surface type</b>	slate granules
<b>Rolls size</b>	1 x 8 m / 8 m <sup>2</sup>
<b>Colours</b>	grey
<b>Packages / pallet</b>	25 pcs
<b>Weight / package</b>	35,5 kg
<b>Weight / pallet</b>	1090 kg

### Additional information

#### Field of application

The product is used on green roofs and decks as an accessory for Kerabit Root Prevention Membrane in, for example, upturns and other visible details that remain exposed to sun rays.

### Checklist

→ liquefied gas torch and hot work licence

# Kerabit

---