


## Kerabit Eaves/Ridge Shingle Easy

Päivitetty 19.3.2026 Tulostettu 2.7.2026

Kerabit Easy Eave/Ridge Shingle is a eave and ridge shingle designed to be used with Kerabit K Easy bitumen roofing. A 1-metre shingle on the ridge is cut into three pieces, rotated 90 degrees and overlapped for the length of the adhesive surface.

The carrier of the product consists of non-woven glass fibre with a modified bitumen coating on both sides. The bottom surface is coated with adhesive bitumen, the top with slate granulates or slag (black).

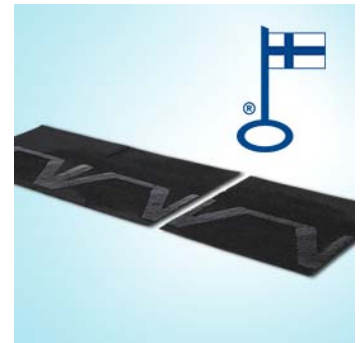

### Technical data

|  |  |
|--|--|
| <b>Manufacturer / Manufactured for</b> | Kerabit Oy, Lohja plant  |
| <b>Country of origin</b>               | Finland  |
| <b>Conformity marking</b>              | CE   |
| <b>Quality control</b>                 | Quality control carried out at the Plant quality control and a quality control agreement between the Plant and Eurofins Expert Services Oy |
| <b>Nominal thickness</b>               | approx. 3,2 mm   |
| <b>Dimensions</b>                      | 1 x 0,33 m = 3 x 0,33 x 0,33 m   |
| <b>Nominal weight</b>                  | 4000 - 4400 g/m <sup>2</sup>   |
| <b>Weight of the supportive layer</b>  | 100 - 120 g/m <sup>2</sup>   |
| <b>Supportive layer</b>                | glass fibre non-woven  |
| <b>Surface type</b>                    | slate granulates (grey) or slag (black)  |
| <b>Colours</b>                         | black and gray   |
| <b>Packages / pallet</b>               | 21   |
| <b>Weight / package</b>                | 21,5 kg, black 24,2 kg   |
| <b>Weight / pallet</b>                 | 477 kg, black 534 kg   |

### Additional information

Gain / package:

- eaves 15 linear metres
- ridge 7.4 linear metres