


## Kerabit Eaves/Ridge Shingle Easy

Päivitetty 12.7.2024 Tulostettu 23.2.2025

Kerabit Easy Eave/Ridge Shingle is a eave and ridge shingle designed to be used with Kerabit K Easy bitumen roofing. A 1-metre shingle on the ridge is cut into three pieces, rotated 90 degrees and overlapped for the length of the adhesive surface.

The carrier of the product consists of non-woven glass fibre with a modified bitumen coating on both sides. The bottom surface is coated with adhesive bitumen, the top with slate granulates or slag (black).

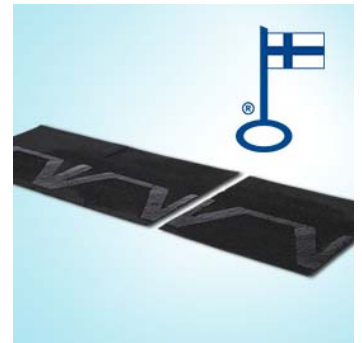

### Technical data

<b>Manufacturer / Manufactured for</b>	Kerabit Oy, Lohja plant
<b>Country of origin</b>	Finland
<b>Conformity marking</b>	CE
<b>Quality control</b>	Quality control carried out at the Plant quality control and a quality control agreement between the Plant and Eurofins Expert Services Oy
<b>Nominal thickness</b>	approx. 3,2 mm
<b>Dimensions</b>	1 x 0,33 m = 3 x 0,33 x 0,33 m
<b>Nominal weight</b>	4000 - 4400 g/m <sup>2</sup>
<b>Weight of the supportive layer</b>	100 - 120 g/m <sup>2</sup>
<b>Supportive layer</b>	glass fibre non-woven
<b>Surface type</b>	slate granulates or slag (black)
<b>Colours</b>	black, gray, red, brown and green
<b>Packages / pallet</b>	21
<b>Weight / package</b>	21,5 kg, black 24,2 kg
<b>Weight / pallet</b>	477 kg, black 534 kg

### Additional information

Gain / package:

- eaves 15 linear metres
- ridge 7.4 linear metres